




CC28 Transmitter

For combustible gases and vapors in Ex zones

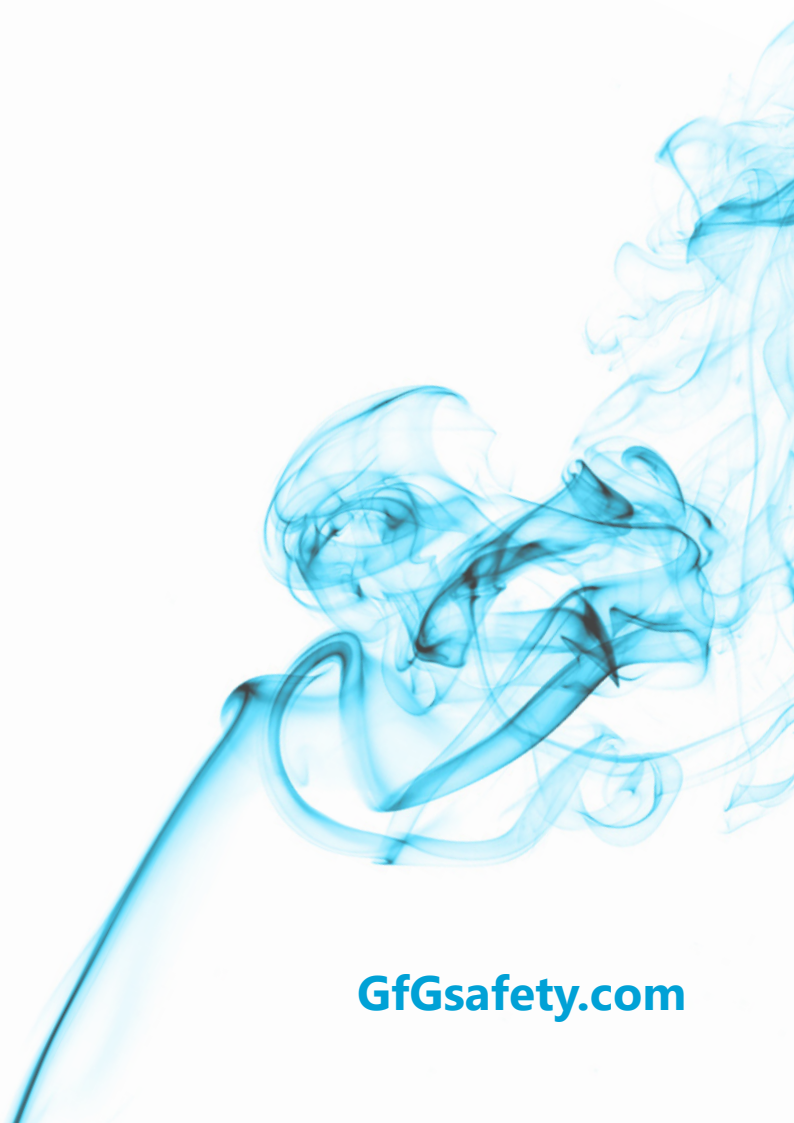

CC28 Transmitter

For combustible gases and vapors in Ex zones



For monitoring combustible gases and vapors in hazardous areas, the CC28 transmitter in combination with GfG's proven gas measurement controllers is a reliable and economical solution. Short response times ($t_{90} \leq 9$ s; depending on gas type and sensor) allow fast warning of gases such as methane or propane.

The design is ATEX certified. With ignition protection types „d“ (flameproof enclosure) and „e“ (increased safety), safe use in Ex zone 1 is possible. In addition, the CC28 hardware complies with the European Functional Safety Standard DIN EN 61508-2: 2011 for many gases.



CC28 with RC2 remote control

Communication and service

Signal transmission is based on the 4-20 mA industry standard. Smart Sensor technology enables fast and uncomplicated sensor replacement. Test gas can be added via calibration adapter.

RC2 remote control (optional)

Some combustible gases such as methane, hydrogen and ammonia are lighter than air. Transmitters with such sensors are therefore installed near the ceiling. To simplify servicing, these transmitters can be

equipped with a permanently installed cable. This allows the RC2 remote control with display to be connected for maintenance work. Inspection, maintenance and adjustment are thus greatly simplified. Service can be performed by a single technician.

Reliable measurement and minimal operating costs

The chimney effect provides rapid detection of combustible gases and vapors. This leaves crucial seconds to initiate countermeasures.

The built-in temperature compensation ensures highest measurement accuracy. The low maintenance requirements and long sensor service life keep operating costs to a minimum. Sensor wear is significantly reduced by the automatic shutdown (from 112 % LEL).

Variants for different applications

The basic variant of the CC28 is sufficient for many applications. For special requirements, the CC28 is also available in additional versions:

- CC28** basic version for a wide range of flammable gases
- CC28 D** with display to indicate the current measured value
- CC28 DA** with display, LED warning lights and alarm buzzer

In combination with GfG's high-performance controllers, all versions of the CC28 are a good choice for a wide range of combustible gases to be monitored.

Overview of gases and SI levels:		1001	1002			1001	1002			1001	1002	
Other gases on request.	» Acetone	(C ₃ H ₆ O)	2	3	» Ethanol	(C ₂ H ₆ O)	2	3	» Methanol	(CH ₄ O)	2	3
	» Acetylene	(C ₂ H ₂)	2	3	» Ethyl acetate	(C ₄ H ₈ O ₂)	2	3	» n-Nonane	(C ₉ H ₂₀)	2	3
	» Ammonia	(NH ₃)	2	3	» Ethylene	(C ₂ H ₄)	2	3	» Propane	(C ₃ H ₈)	2	3
	» n-Butane / Isobutane	(C ₄ H ₁₀)	2	3	» Hexane	(C ₆ H ₁₄)	2	3	» Propyne	(C ₃ H ₄)	2	3
	» Diethyl ether	(C ₄ H ₁₀ O)	2	3	» Isopropanol	(C ₃ H ₈ O)	2	3	» Propylene	(C ₃ H ₆)	2	3
	» Natural gas	(HC mixture)	2	3	» Carbon monoxide	(CO)	2	3	» Toluene	(C ₇ H ₈)	2	3
	» Ethane	(C ₂ H ₆)	2	3	» Methane	(CH ₄)	2	3	» Hydrogen	(H ₂)	2	3

CC28 Technical Data:

Measuring principle:	Catalytic combustion (CC)	Temperature:	-20 to +50 °C (Ex zone) -25 to +55 °C	Dimensions:	100 x 168 x 55 mm (W x H x D)
Measuring ranges:	0 to 100 % LEL 0 to 4 vol% ¹	Humidity:	5 to 90 % r. h.	Approvals / Certifications	
Gas supply:	Diffusion or gassing with flow adapter	Air pressure:	80 to 120 kPa	Markings & type of protection:	⊕ II 2G Ex demb [ib] IIC T4 Gb -20 °C ≤ Ta ≤ +50 °C
Lifetime of the sensor:	5 years ²	Output signal:	4-20 mA	Functional Safety (SIL):	DIN EN 61508-2: 2011 ⁴
Response time:	t ₉₀ ≤ 9 s ³	Power supply:	15 to 30 V DC		
		Housing:	Plastic		
		Protection class:	IP64		
		Weight:	700 g		

¹ For ammonia only, ² Depending on operating conditions, ³ Depending on gas type and sensor, ⁴ Depending on sensor

GfG (Pty.) Ltd.

7 Voortrekker Road, Mindalore North - Krugersdorp | P. O. Box 6004 | ZA-Westgate 1734

Phone: +27 11 955-4862 | Fax: +27 11 955-4741 | E-mail: info@gfg.co.za

GfGsafety.com

