



Fixed gas detection systems

smart
GasDetection
Technologies




D-ReX[®]

State-of-the-art monitoring of gases in the semiconductor industry



 **MADE IN
GERMANY**

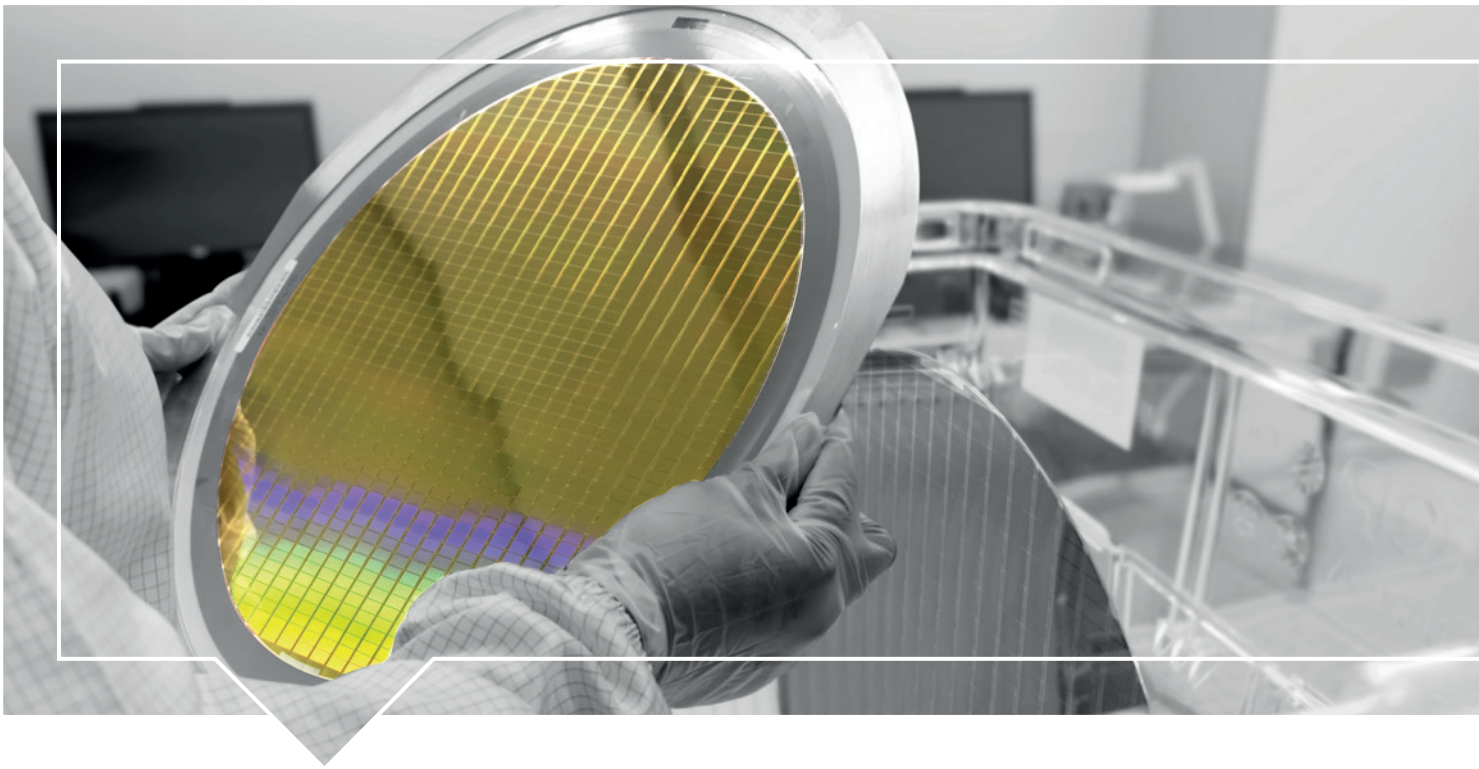

D-ReX[®] Designed for Versatility

Gases are used in many areas of application and process steps of the semiconductor industry. This results in a wide variety of associated requirements for measuring methods, sensors, measuring ranges and communication.

The D-ReX allows you to select the ideal combination of measurement method and sensor for every requirement. Benefit from the DIN-rail mounted gas detector's easy-to-understand user interface, its modern, future-proof technology, and simple and cost-effective maintenance.

Versatility in measurement methods

The D-ReX gas detector series lets you choose between different measuring methods to ensure you are using the ideal solution for every requirement.

» D-ReX PoU (Point of Use)

Monitoring of gases at the point of use using the diffusion method.

» D-ReX Pol (Point of Installation)

Monitoring of gases by diffusion method using a remote sensor cartridge. Distance between the D-ReX and the cartridge can be up to 1200 meters / 4000 feet.

» D-ReX PoS (Point of Sampling)

Monitoring of gases via extraction using a built-in pump (suction distance up to 30 meters). The sensor is situated within the D-ReX. Furthermore, the D-ReX PoS is the only gas detector in the world that offers optional monitoring of the hose line for leaks. The Line Integrity Monitoring (LIM) technology continuously works to prevent unnoticed absorption of secondary air.

» D-ReX PoS with pyrolyzer

The Py-ReX is the matching pyrolyzer for the D-ReX PoS to monitor gases that are either too toxic or chemically inactive to be measured directly. The Py-ReX is simply mounted between the suction hose and the D-ReX and breaks the monitored gas down into harmless, easy-to-detect components.

D-ReX versions and options

D-ReX Version	Internal Sensor (Diffusion)	External Sensor (Diffusion)	Pump module (eXtraction Module)	Py-ReX	Internal Relays	LonWorks
Point of Use (PoU)	✓				5 (option)	(option)
Point of Installation (Pol)		✓			5 (option)	(option)
Point of Sampling (PoS)	✓		✓	✓*	5 (option)	(option)

* Required for certain gases

Versatility in gases and measuring ranges

A wide range of durable smart sensors, covering all important gases of the semiconductor industry as well as the relevant measuring ranges, is available for the D-ReX. The following list is merely a selection of these. Please note that a pyrolyzer is needed for the detection of some gases (*).

List of detectable gases using an EC Sensor

Formula	Gas	Nominal Range
AsH ₃	Arsine	0-1 ppm
AsH ₃	Arsine / no H ₂ (no cross-sensitivity to H ₂)	0-1 ppm
B ₂ H ₆	Diborane	0-1 ppm
Br ₂	Bromine	0-5 ppm
Cl ₂	Chlorine	0-10 ppm
ClF ₃	Chlorine trifluoride	0-1 ppm
ClO ₂	Chlorine dioxide	0-2 ppm
CO	Carbon monoxide	0-500 ppm
COCl ₂	Phosgene	0-2 ppm
DCS	Dichlorosilane	0-30 ppm
ETO	Ethylene oxide	0-20 ppm
F ₂	Fluorine	0-5 ppm
GeH ₄	Germanium hydrogen	0-5 ppm
H ₂	Hydrogen	0-2000 ppm
H ₂	Hydrogen	0-1 Vol.-%
H ₂	Hydrogen	0-4 Vol.-%
H ₂ S	Hydrogen sulfide	0-100 ppm
H ₂ Se	Hydrogen selenide	0-5 ppm
HBr	Hydrogen bromide	0-30 ppm
HCl	Hydrogen chloride	0-30 ppm
HCN	Hydrogen cyanide	0-30 ppm
HF	Hydrogen fluoride	0-10 ppm
HMDS	Hexamethyl disilazane	0-0.5 Vol.-%

Other gases on request.

Formula	Gas	Nominal Range
N ₂ H ₄	Hydrazine	0-1 ppm
NH ₃	Ammonia	0-100 ppm
NH ₃	Ammonia	0-1000 ppm
NH ₃	Ammonia	0-5000 ppm
NO	Nitrogen monoxide	0-100 ppm
NO ₂	Nitrogen dioxide	0-30 ppm
O ₂	Oxygen (5-year sensor, lead-free)	0-25 Vol.-%
O ₃	Ozone	0-1 ppm
O ₃	Ozone	0-5 ppm
PH ₃	Phosphine	0-1 ppm
SiH ₄	Silane	0-50 ppm
SO ₂	Sulfur dioxide	0-10 ppm
TEOS	Tetraethyl orthosilicate	0-100 ppm
TMB	Trimethyl borate	0-500 ppm

List of detectable gases which require a pyrolyzer

Formula	Gas	Nominal Range
C ₂ H ₂ Cl ₂	Trans-1,2 dichloroethylene (DCE)	tbd
C ₄ F ₆	Hexafluorobutadiene	tbd
C ₅ F ₈	Octafluorocyclopenten	tbd
CH ₃ F	Methyl fluoride	tbd
NF ₃	Nitrogen trifluoride	0-50 ppm
SF ₆	Sulfur hexafluoride	tbd

List of detectable gases using an IR Sensor

Formula	Gas	Nominal Range
C ₃ H ₈	Propane	0-2 vol %
CH ₄	Methane	0-5 vol %
CO ₂	Carbon dioxide	0-1 vol %
CO ₂	Carbon dioxide	0-5 vol %
CO ₂	Carbon dioxide	0-10 vol %
CO ₂	Carbon dioxide	0-25 vol %
CO ₂	Carbon dioxide	0-50 vol %
N ₂ O	Nitrous oxide	0-1000 ppm
N ₂ O	Nitrous oxide	0-1 vol %

List of detectable gases using a CC Sensor

Formula	Gas	Nominal Range
C ₂ H ₂	Acetylene	0-100 % LEL
C ₂ H ₄	Ethylene	0-100 % LEL
C ₂ H ₆	Ethane	0-100 % LEL
C ₃ H ₈	Propane	0-100 % LEL
C ₄ H ₁₀	Butane	0-100 % LEL
C ₅ H ₁₂	Pentane	0-100 % LEL
C ₆ H ₁₄	Hexane	0-100 % LEL
CH ₄	Methane	0-100 % LEL
H ₂	Hydrogen	0-100 % LEL

Formula	Gas	Nominal Range
C ₄ H ₈	Isobutylene	0-2000 ppm
C ₇ H ₈	Toluene	0-1000 ppm
C ₇ H ₁₆	Heptane	0-3000 ppm

Versatility in communication

A simple, straightforward visual display of readings, alarms and error messages as well as the capability to be easily integrated into alarm and monitoring systems are what make good gas detectors.

The D-ReX offers:

- » A high-resolution color display
- » Plain text information instead of cryptic codes
- » Bluetooth® for easy maintenance and access to all relevant information via app
- » Power-over-Ethernet communication (Modbus/TCP, web interface)
- » RS-485 (Modbus/RTU)
- » LonWorks® (optional)
- » Analog: 4–20 mA signal
- » 5x internal configurable relays (optional)

- 1 D-ReX
- 2 Py-ReX
- 3 Ethernet-cable with PoE
- 4 IP Code sticker
- 5 Sensor cartridge with detachable pipe flange adapter (up to 1200 meters / 4000 feet)
- 6 Connector cartridge for remote sensors (M12)
- 7 Sensor cartridge with detachable diffusion mode adapter
- 8 Integrated pump (aspiration tube of up to 30 m / 100 feet)
- 9 Mounting bracket
- 10 Touch protection insert for sensors
- 11 Pipe flange saddle
- 12 Lower housing covers



Technical Specification: D-ReX Series

Gases:	See gas list
Measuring Principle:	Sensor dependent; available options: EC = electrochemical CC = catalytic combustion IR = infrared PID = photoionization
Sampling Method:	Depending on configuration
PoU	» Diffusion
Pol	» Remote sensor
PoS	» Extraction with pump (if applicable, in combination with Py-ReX)
Display and Interface:	Display: 2.4" full color TFT (320 x 240 pixels) Interface: 5 push buttons
Selectable Languages:	German, English (more languages coming soon)
Communication:	» Analog outlet: 4–20 mA output » Analog inlet 4-20 mA for Py-ReX (D-ReX PoS only) » Digital: RS-485 (Modbus/RTU) » 10/100 Mbit Ethernet (Modbus/TCP) » Bluetooth » LonWorks® (option) Relays: 5x internal (configurable) form C relays (option) Max. 2 A / 30 V DC Min. 10 mA / 5 V can optionally be upgraded with an external relay module with up to 16 relays each
Response Time:	Varies by sensor (see sensor data sheet)
Expected Average Life of the Sensor:	Varies by sensor (see sensor data sheet)
Operating Temperature:	-10 to +40 °C 14 to 104 °F
Operating Humidity:	5 to 90 % RH
Operating Pressure:	70 to 130 kPa
Power Supply:	12 to 30 V DC SELV/PELV PoE = 48 V DC
Housing:	Plastic
Protection Class:	PoS-Version: base unit IP30 (optionally IP64) / gas sensor IP64 PoU-Version: base unit IP30 (optionally IP64) / gas sensor IP43 Pol-Version: base unit IP30 (optionally IP64) / gas sensor IP40–IP64, depending on installation situation
Mounting:	(DIN) rail IEC/EN
Weight:	650 g up to 850 g
Dimensions:	145 x 105 x 78 mm
(W x H x D)	5.7 x 4.1 x 3.0 in
Labelling:	CE, FCC, IC



www.gfgsafety.com/us-en

© GfG Instrumentation, Inc. 2024
All specifications on this brochure are subject to technical changes due to further development.

USA and Canada
Latin America
Germany
South Africa
Asia Pacific
Great Britain
Switzerland
France
Poland
Austria
Netherlands

info@goodforgas.com
info@goodforgas.com
info@gfg-mbh.com
info@gfg.co.za
sales@gfg-asiapac.sg
sales@gfggas.co.uk
info@gfg.ch
alainflachon@gfg-gasdetection.fr
biuro@gfg.pl
austria@gfg-mbh.com
info@gfg-gasdetection.nl



GfG Instrumentation, Inc.
1194 Oak Valley Drive, Suite 20, Ann Arbor, MI 48108 USA
Phone: (734) 769-0573 • Toll Free (USA / Canada): (800) 959-0329
Website: www.gfgsafety.com/us-en • info@goodforgas.com

Rev. 1 (02/20/24)